

# LOOPING

20008/42 20008/58 20008/80

## PLAFÓN

Con este modelo volteamos la estructura metálica recubierta de tela blanca elástica, con formas que evocan giros no poligonales y favorecen la singularidad y luminosidad de una estancia diferente.

## SURFACE LIGHT

Non-polygonal shapes bending the design harmoniously to soft the space around. Suitable on any surface, vertical, horizontal or sloping. Removable stretching fabric covering a metal frame.



REF.  
20008/42

PLAFÓN / SURFACE LIGHT  
IP20

MATERIAL  
Metal y tela elástica /  
Metal & stretching fabric


ACABADO / FINISH  
Blanco óptico / Optical white

INSTALACIÓN / INSTALLATION  
- E27 LED 2x10W Ø6cm

- PCB-LED 20W 700mA  
Cálida / Warm 3000K 1180lm  
Neutra / Neutral 4000K 1235lm



Ⓥ dim 1-10V      Ⓞ dim DALI  
Ⓟ dim PUSH      Ⓡ REMOTE

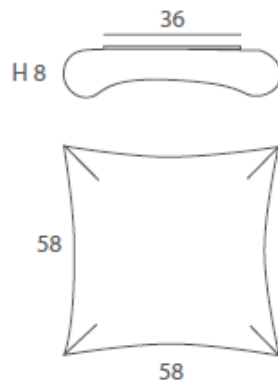

REF.  
20008/58

PLAFÓN / SURFACE LIGHT  
IP20


MATERIAL  
Metal y tela elástica /  
Metal & stretching fabric

ACABADO / FINISH  
Blanco óptico / Optical white

INSTALACIÓN / INSTALLATION  
- E27 LED 4x10W Ø6cm

- PCB-LED 40W 700mA Ⓥ Ⓞ Ⓟ  
Cálida / Warm 3000K 2400lm  
Neutra / Neutral 4000K 2510lm

-PCB-LED 55W 500mA Ⓞ Ⓟ  
Cálida / Warm 3000K 3115lm  
Neutra / Neutral 4000K 3258lm

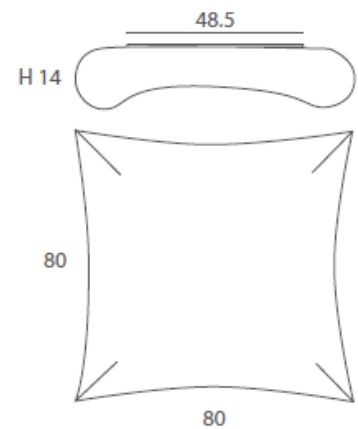

REF.  
20008/80

PLAFÓN / SURFACE LIGHT  
IP20

MATERIAL  
Metal y tela elástica /  
Metal & stretching fabric

ACABADO / FINISH  
Blanco óptico / Optical white

INSTALACIÓN / INSTALLATION  
- E27 LED 4x10W Ø6cm

- PCB-LED 40W 700mA Ⓥ Ⓞ Ⓟ  
Cálida / Warm 3000K 2400lm  
Neutra / Neutral 4000K 2510lm

-PCB-LED 70W 500mA Ⓥ Ⓞ Ⓟ  
Cálida / Warm 3000K 4492lm  
Neutra / Neutral 4000K 4698lm

-PCB-LED 72W 300mA Ⓡ  
Regulable en temp./ brillo  
Dimmable temp./ brightness  
3000K - 6000K max.3632lm



\* Archivos 3D y ficheros fotométricos disponibles en web /  
3D and photometric files available on the web  
\*(bombillas no incluidas / lamps not included)

# LOOPING

## DOBLE ENCENDIDO

---

**MODELOS DISPONIBLES CON DOBLE ENCENDIDO (en la instalación PCB-LED 40W) :**

*MODELS AVAILABLE FOR 2 SWITCHES (For installation PCB-LED 40W) :*

**20008/58, 20008/80**

40W



20W



20W



El aparato se suministra así desde fábrica

*This is the standard switch configuration supplied from factory if there is not 2-switch request in your order*



Teniendo en la instalación dos llaves, se puede pedir desde fábrica con dos encendidos

*If installation has possibility of 2 switches, we may supply as per above 2-switch configuration, on request*